



# Asus X550ZA-SA100603E motherboard Replacement

To remove the motherboard in case of malfunction or for the sake of upgrading your computer.

Written By: Tim Linton



## INTRODUCTION

This is how to remove the motherboard from your computer. If you are trying to improve the CPU, get a higher quality graphics card, or improve the operating power of your computer in a number of ways, this guide shows you how.

---




### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-



## Step 1 — Keyboard

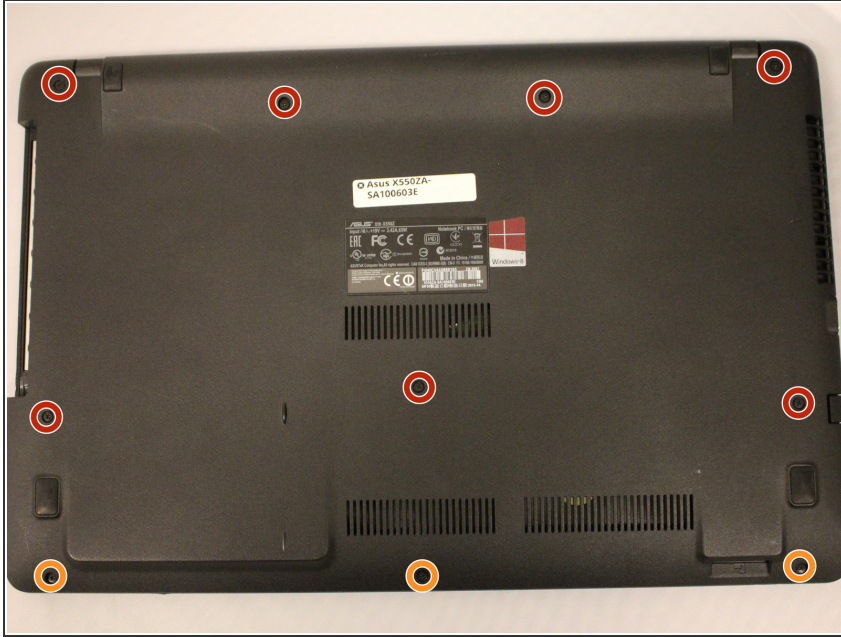


- Using the Phillips #0 screwdriver remove the seven 14 mm screws on the bottom of the laptop.
- Then use the Phillips #0 to remove the three 4 mm screws on the bottom of the laptop.

## Step 2




- Insert a plastic opening tool between the keyboard and base of the laptop to pry the keyboard away from the base. Do this around the entire perimeter of the laptop.
  - This disconnects the face of the keyboard. Gently lift the keyboard up to expose the motherboard.
- ⚠ There are still ribbon cables connecting the keyboard face to the motherboard. Do not pull the keyboard away roughly.

## Step 3

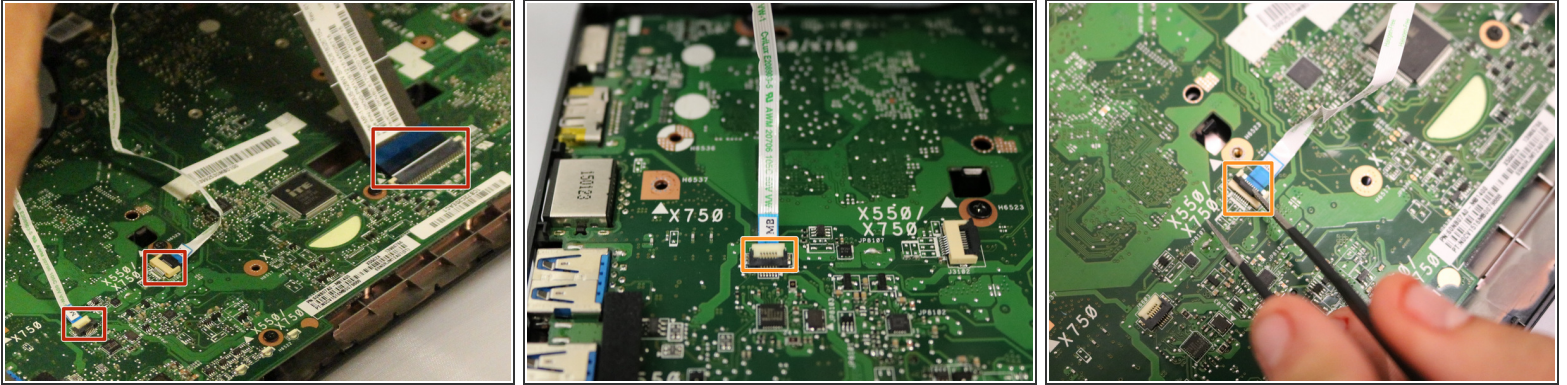

- Gently lift the keyboard to access the three ribbon cables connected to the motherboard
- Using precision tweezers, flip up the white and black retaining flaps on the ZIF connectors that hold the two smaller ribbon cables in place.
- Gently pull the ribbon cables from their sockets on the motherboard.

## Step 4

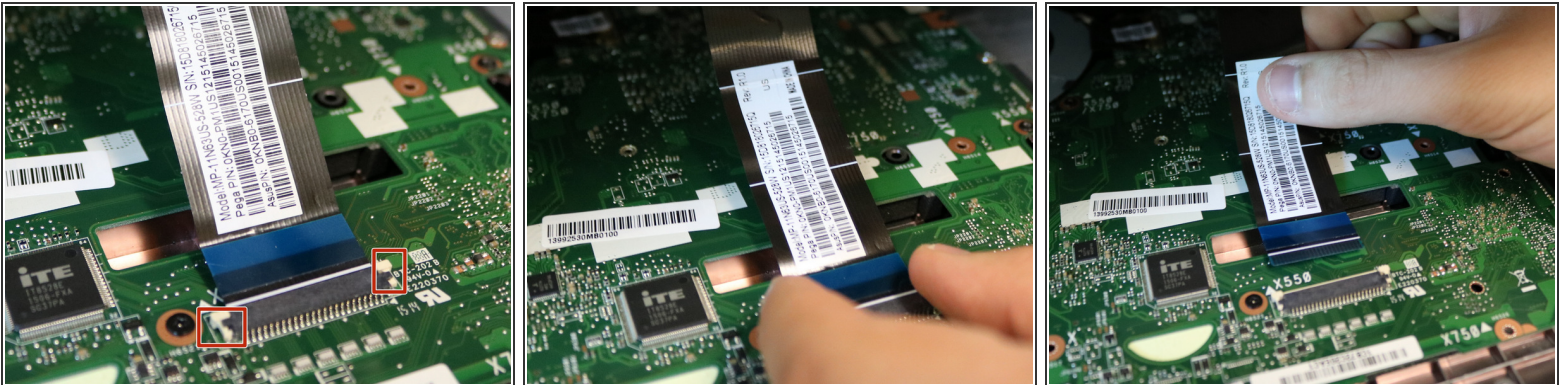

- Push the two white clamps on the large ZIF connector towards the screen.
- Gently remove the track pad ribbon cable from its connector.




## Step 5




- Remove the keyboard

## Step 6 — Battery

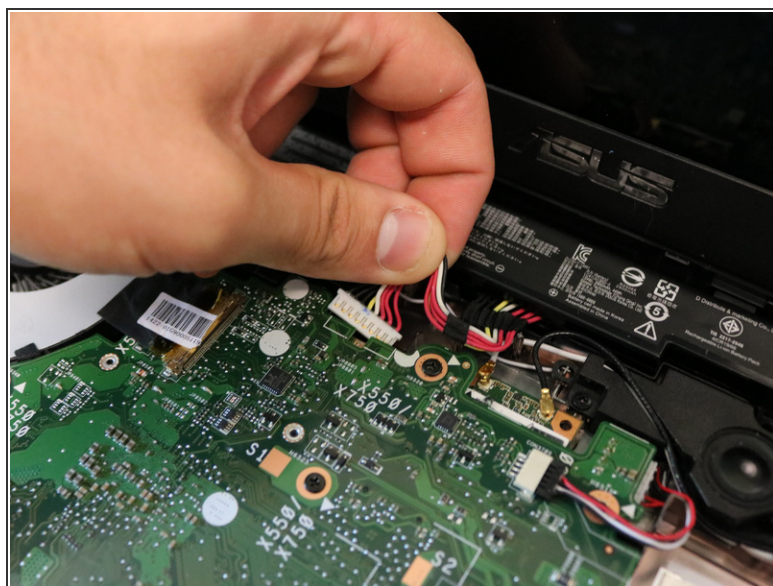

- Disconnect the multi-wire battery plug from the motherboard.

## Step 7

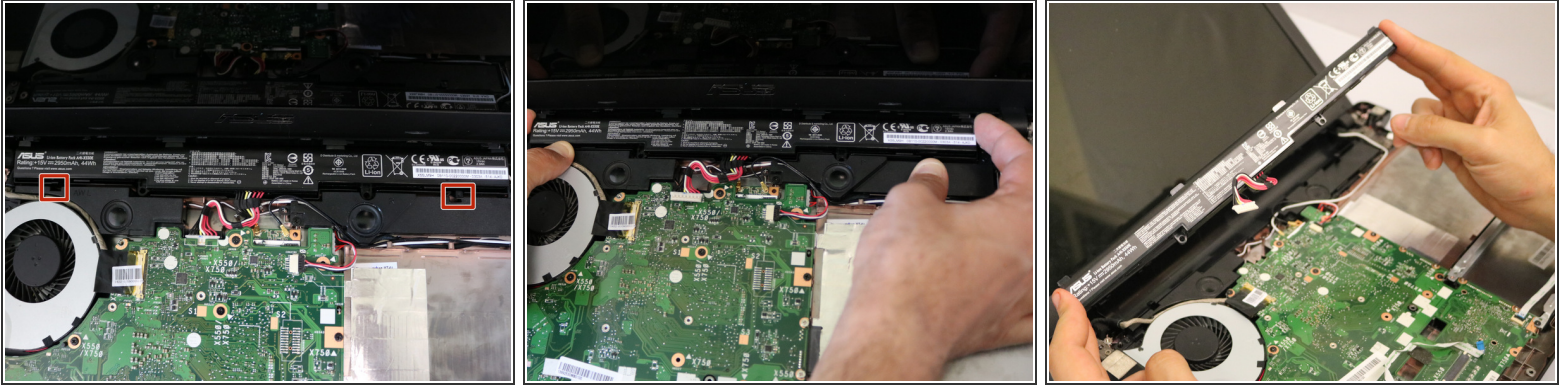

- Pull the two tabs holding the battery in place and lift the battery up. It should remove easily.


## Step 8 — Motherboard



- Using a Phillips #0 screwdriver remove the thirteen black 4 mm screws from the face of the motherboard.
- Using a Phillips #0 head screwdriver remove the four silver 4 mm screws from the face of the motherboard
- Using a Phillips #0 head screwdriver remove the one black 4 mm screw from the indented area above the fan.




## Step 9

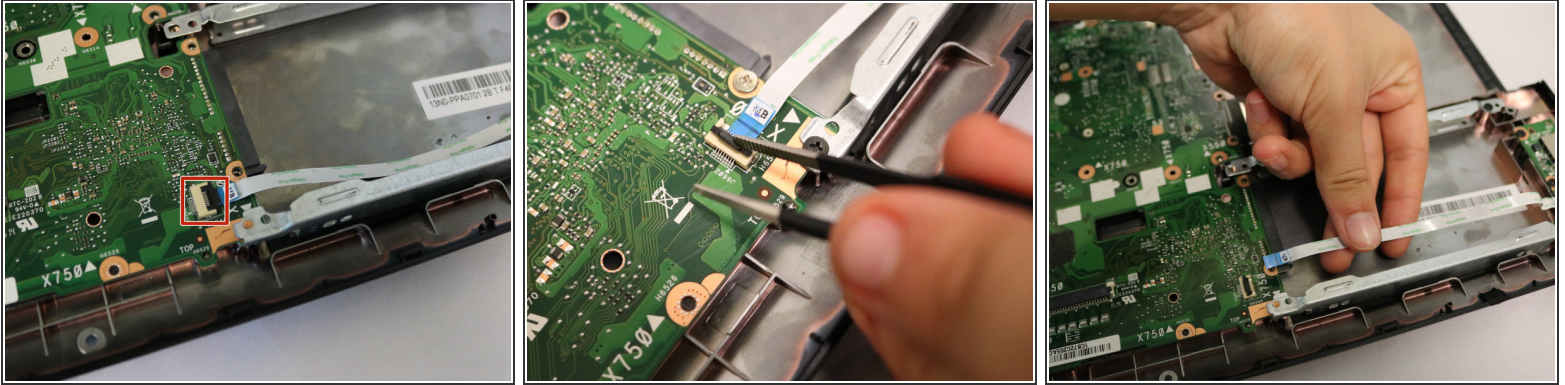

- Using the precision tweezers flip the black switch holding the film connected to the USB port.
- Gently remove the film from it's connection to the motherboard.



## Step 10

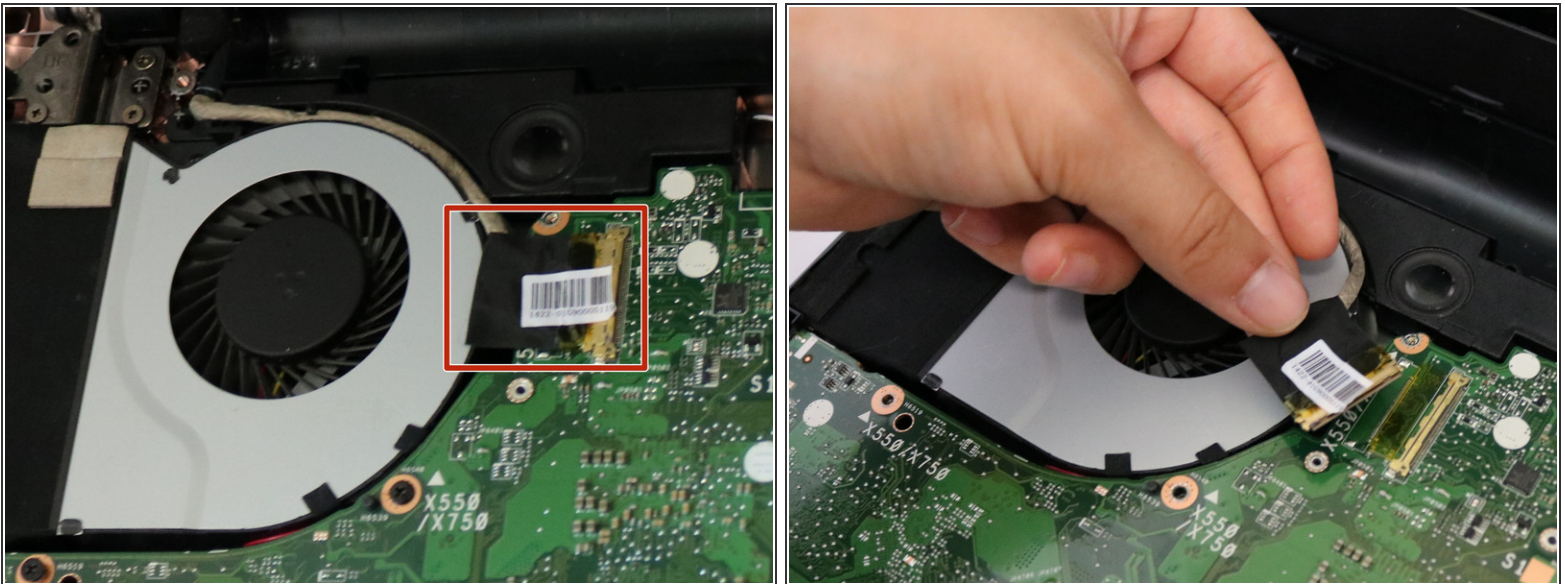

- Gently pull the thick wire in between the fan and the motherboard. To release the wire connected to the motherboard, gently pull towards the cooling fan.




## Step 11

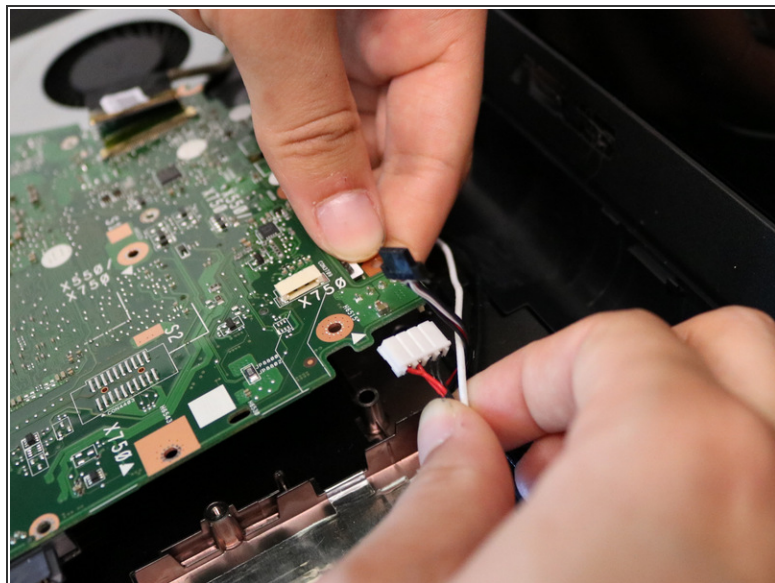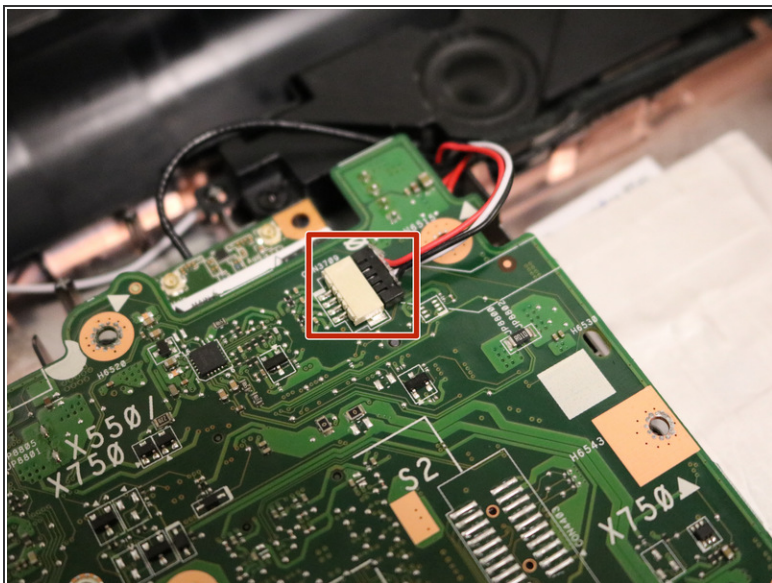

- Gently pull the red, black, and white wire found on the top right-hand corner of the motherboard.

## Step 12

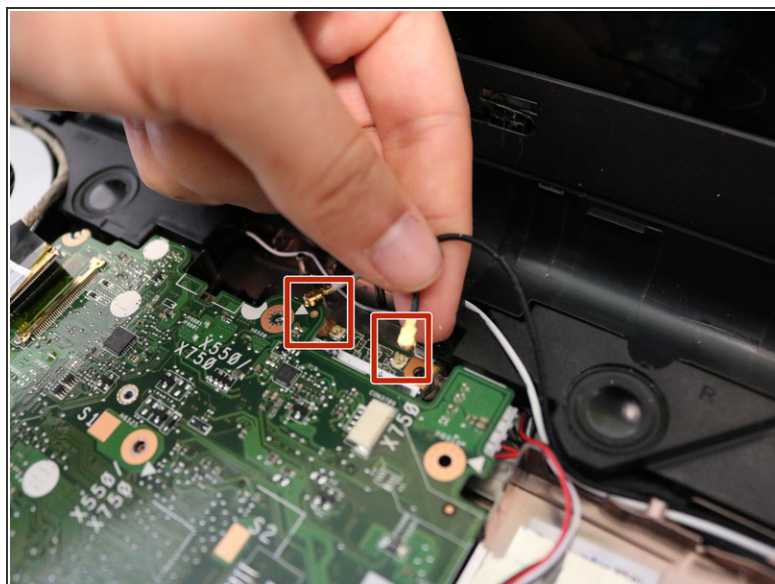

- Lift the black and white wires out of their ports at the top of the motherboard.



## Step 13



- Lift the top right corner of the motherboard to access the final wire.
- Gently remove the wire from the port connecting it to the motherboard.

## Step 14



- Remove the motherboard from the laptop.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-03 09:34:09 AM.